



NETWORK VIDEO RECORDER


DIAMOND SERIES

# 4CH/8CH/16CH 6.0MP NVR

NVR

## CP-N4104-H / CP-N4108-H / CP-N4116-H


300Meters PoE transmission & 4CH/8CH/16CH synchronous playback

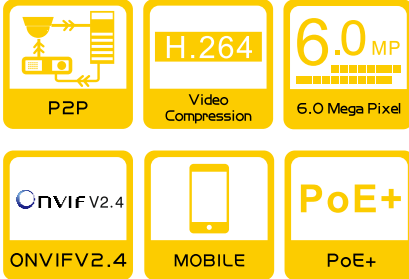

### Key Features

- Third-party IP cameras supported with ONVIF conformance
- Intergrated 4/8 100M PoE+(802.3at) interfaces
- Up to 300 meters long distance transmission of the PoE
- Support PnP for easy IPC discovery and usage
- Up to 6 Megapixels resolution recording, storage and playback
- Simultaneous HDMI and VGA output, the resolution is up to 1080P
- Up to 4/8/16 channels synchronous playback
- Support instant playback
- Support corridor mode


### Audio Talkback

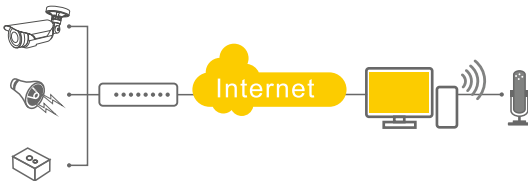

### ISS Mobile



### Dimensions

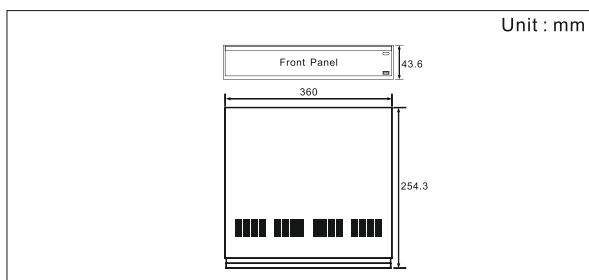

Model NO.	CP-N4104-H	CP-N4108-H	CP-N4116F-H
Video/Audio Input			
IP Video Input	4 CH	8 CH	16 CH
Two-way Audio Input	1 CH, RCA(2.0 Vp-p, 1kΩ)		
Network			
Incoming bandwidth	24Mbps	64Mbps	128Mbps
Video/Audio Output			
HDMI Output	1		
VGA Output	1		
Audio Output	1 CH, RCA		
Decoding			
Live View/ Playback Resolution	6MP/5MP/4MP/3MP/1080P/960P/720P/VGA/D1/CIF		
Recording Resolution	6MP/5MP/4MP/3MP/1080P/960P/720P/VGA/D1/CIF		
Synchronous Playback	4 CH	8 CH	16 CH
Hard Disk			
SATA	1	2	
Capacity	Up to 6TB for each disk		
External Interface			
Network Interface	1RJ-45 10/100/1000Mbps self-adaptive Ethernet interface		
USB Interface	1 USB2.0 + 1 USB3.0		
POE			
Interface	4 independent 10/100 Mbps PoE Ethernet interfaces	8 independent 10/100 Mbps PoE Ethernet interfaces	
Supported Standard	802.3at		
GENERAL			
Power Supply	48V,DC	52V,DC	52V,DC
Consumption	60W (Fully Configured)	94W (Fully Configured)	
Working Temperature	-10°C~ +50°C(14° F ~131° F)		
Working Humidity	43.6mm*360.0mm*254.3mm(1.72**14.17**10.01*),1U		
Weight(without HDD)	1.5KG		

Made in China